


Solvent-based Kerb Paint

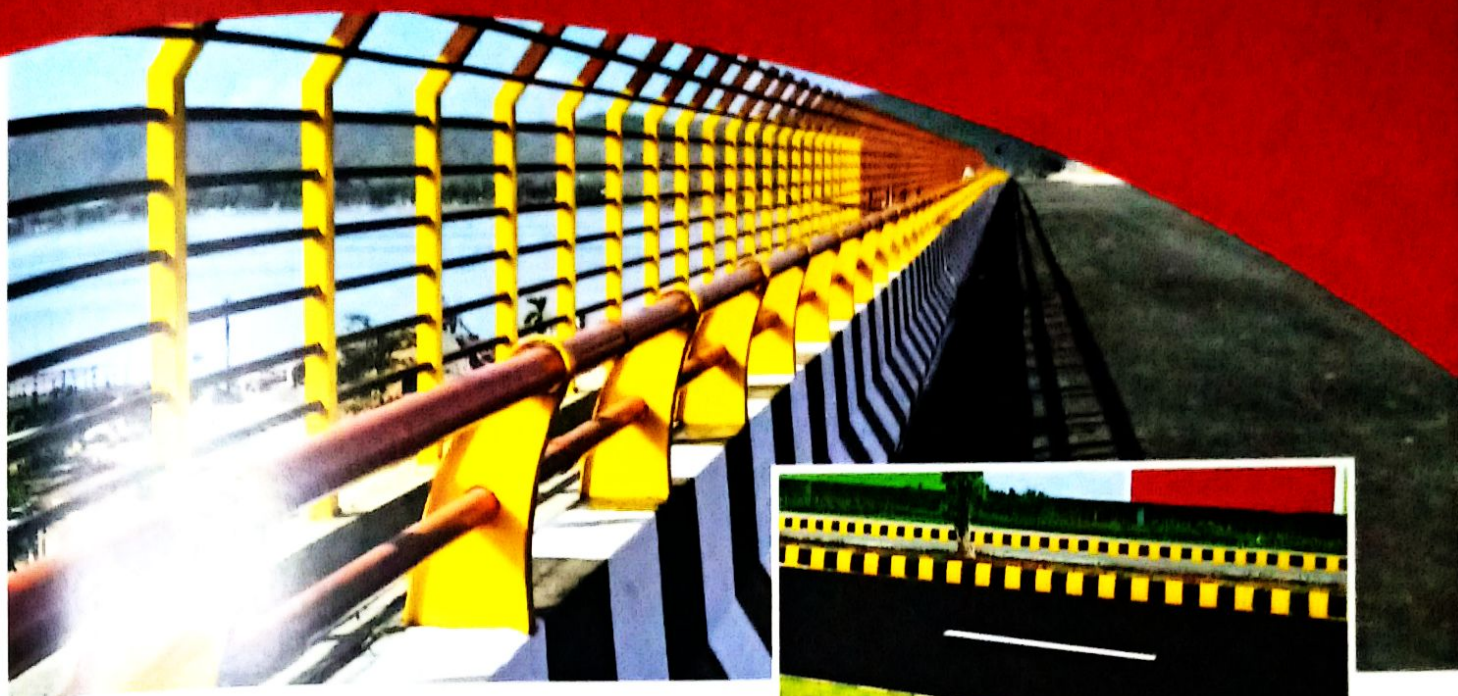

Guideline SB RM Paint is a single pack, alkyd based, kerb and median marking paint which ensures safety on roads with excellent wear and weather resistance properties. It is suitable for kerb painting of new and existing concrete surfaces and precast concrete medians. It is recommended for concrete and paved block surfaces on city roads and also over steel rails and separators over a suitable primer / coating.

Full Gloss • Tough Film • Better Washability

DIRECTIONS FOR USE

SURFACE PREPARATION

Fresh / New Surfaces : Substrate must be fully cured, dry, sound and clean. Strip all loose particles from the surface by wire brushing. Alternatively, high pressure water jetting is recommended to ensure that the surface is free from curing materials, contaminants & dirt. Concrete should be fully cured and may need to be mechanically abraded or water blasted to remove any curing compounds.

Previously Painted Surfaces : All voids, dents are to be repaired and sealed. Surface should be cleaned by wire brushing to make it free from loose mortar, dirt, oil and grease etc.

DIRECTIONS FOR APPLICATION

Apply 1 coat of BP Cement Primer (ST) for concrete surfaces or 1 coat of BP Red Oxide Primer for metal surfaces – after proper thinning. Allow Primer to dry/cure fully before application of Guideline SB Paint. Dilute Guideline SB Paint as per recommended dilution ratio. Apply the first coat and allow to dry for at least 18-24 hours. After the first coat dries, apply the second coat and allow to dry for 18-24 hours**.

R&R PAINTS www.rrpaints.co.in
Old Vinoda Theatre, (New Sonovision Beside)
Arundalpet, Eluru Road,
VIJAYAWADA-520 002
Cell: 9440211878, 7416755999

** Depends on surface conditions, relative humidity, WFT and ambient temperature etc.

COVERAGE*

Substrate	Recommended No. of Coats	Airless Spray / Brush Application / Coat - TCC
Concrete	2	10.9 - 15.2 Sq. M/Litre
Metal		

* Depends on factors such as surface preparation, surface condition, application skill, weather conditions, dilution etc. The coverage mentioned above is under ideal conditions and will vary depending on site conditions.

Surface Recommended Primers

Concrete	1 coat of BP Cement Primer (ST)
Metal	1 coat of BP Red Oxide Primer

Pack Sizes Metal Drum (20 Lt)

Shade Range offered White, Golden Yellow, Black, Red



Usage Areas : On Concrete, Plastered & Metal surfaces.



BERGER
GUIDELINE

Guideline SB Paint
conforms to IS 2932 specifications

FOR DETAILED INSTRUCTIONS & METHODOLOGY,
REFER TECHNICAL DATA SHEET